

Universal fault-tolerant quantum computation with only transversal gates and error correction

Adam Paetznick¹ and Ben W. Reichardt²

¹*David R. Cheriton School of Computer Science and Institute for Quantum Computing,
University of Waterloo, Waterloo, Ontario N2L 3G1, Canada*

²*Ming Hsieh Department of Electrical Engineering,
University of Southern California, Los Angeles, California 90089, USA*
(Dated: April 15, 2013)

Transversal implementations of encoded unitary gates are highly desirable for fault-tolerant quantum computation. Though transversal gates alone cannot be computationally universal, they can be combined with specially distilled resource states in order to achieve universality. We show that “triorthogonal” stabilizer codes, introduced for state distillation by Bravyi and Haah [Phys. Rev. A **86** 052329 (2012)], admit transversal implementation of the controlled-controlled- Z gate. We then construct a universal set of fault-tolerant gates *without* state distillation by using only transversal controlled-controlled- Z , transversal Hadamard, and fault-tolerant error correction. We also adapt the distillation procedure of Bravyi and Haah to Toffoli gates, significantly improving on existing Toffoli distillation schemes.

Quantum computers are highly susceptible to noise. For protection, the data can be stored in a code [1, 2], and encoded operations can be applied “fault-tolerantly,” in order to prevent a single error from spreading to multiple qubits in a codeword [3]. Between operations, fault-tolerant error-correction keeps errors from accumulating. The simplest fault-tolerant operation is the application of physical gates transversally across the codewords, meaning that the j th gate is applied to the j th qubits of the codewords, for every j . Depending on the gate, this may or may not preserve the codespace and implement a valid encoded operation. Unfortunately, no quantum code admits transversal implementation of a universal set of encoded gates [4]. Instead, universality is usually achieved by combining some transversal gates with specially prepared resource states in a process known as state injection and distillation [5]. State distillation can be orders of magnitude more costly than direct transversal gates, and dominates the resource overhead for implementing a quantum computer [6, 7].

Here we propose a way of implementing a universal set of quantum gates transversally, up to a correction that can be made by the standard error-correction procedure. Separate injection and distillation procedures are not required. The construction works only for the class of “triorthogonal” quantum stabilizer codes, introduced recently by Bravyi and Haah [8]. Therefore, implementing our construction directly may not reduce the overhead compared to using state distillation with more efficient codes that can tolerate higher noise rates. However, based on our construction, we derive a state-distillation procedure that, with realistic error parameters, reduces the overhead more than five-fold compared to previous state-of-the-art state distillation methods [9, 10].

Our construction is based on two main insights. First, we observe that the controlled-controlled- Z operation (defined by $\text{CCZ} |a, b, c\rangle = (-1)^{abc} |a, b, c\rangle$ for bits a, b, c)

can be implemented transversally for any triorthogonal quantum code. Second, we show that the Hadamard $H = \frac{1}{\sqrt{2}} \begin{pmatrix} 1 & 1 \\ 1 & -1 \end{pmatrix}$ can be implemented by transversal H gates followed by stabilizer measurements and Pauli X corrections. Together, H and CCZ are universal for quantum computation [11, 12].

As an example, consider the $[[15, 7, 3]]$ quantum Hamming code, which uses 15 qubits to protect 7 encoded qubits to distance 3. The codespace is the simultaneous $+1$ eigenspace of the eight operators

$$\begin{aligned} &IIIIIIIXXXXXXX, \quad IIIIIIZZZZZZZZ, \\ &IIIXXXIIIIIXXX, \quad IIZZZZIIIIIZZZ, \\ &IXXIIXXIIXXIIXX, \quad IZZIIZZIIZZIIZZ, \\ &XIXIXIXIXIXIXIX, \quad ZIZIZIZIZIZIZIZ, \end{aligned}$$

each the tensor product of Pauli operators I , X and Z . Choose a basis for this codespace so the logical X and Z operators on the first encoded qubit are transversal X and Z , respectively. Provided that the other six “gauge” qubits are prepared as encoded $|0^6\rangle$, the CCZ operation is transversal. Moreover, transversal H gates preserve the codespace and apply a logical H to the first encoded qubit. Transversal H corrupts the gauge qubits, but they can be restored to $|0^6\rangle$ by measuring the six corresponding logical Z operators and applying X corrections as necessary. Measurement of the gauge qubits’ logical Z operators can be performed fault-tolerantly using standard error-correction techniques [3, 13].

In addition to allowing for universal quantum computation directly, our result also permits more efficient state injection and distillation when non-triorthogonal codes are used for computation. Traditional injection and distillation procedures are used for fault-tolerantly implementing the $T = \begin{pmatrix} 1 & 0 \\ 0 & e^{i\pi/4} \end{pmatrix}$ gate. Recently, Eastin [9] and Jones [10, 14] have shown that the cost of implementing a Toffoli gate can be reduced by distilling so-called Toffoli *states* rather than using fault-tolerant T gates. We




FIG. 1: The Toffoli gate is equivalent to a CCZ gate in which the target qubit is conjugated by Hadamard gates.

observe that the distillation procedure of [8] for T gates can be adapted to Toffoli states in order to improve on the procedures of Eastin and Jones.

STABILIZER CODES BASED ON TRIORTHOGONAL MATRICES

Let us begin by specifying the construction of stabilizer codes based on triorthogonal matrices. For two binary vectors $f, g \in \{0, 1\}^n$, let $f \cdot g \in \{0, 1\}^n$ be their entry-wise product, and let $|f|$ denote the Hamming weight of f . Call an $m \times n$ binary matrix G , with rows $f_1, \dots, f_m \in \{0, 1\}^n$, “triorthogonal” if

$$|f_i \cdot f_j| = 0 \pmod{2} \quad \text{and} \quad |f_i \cdot f_j \cdot f_k| = 0 \pmod{2}$$

for all pairs (i, j) and triples (i, j, k) of distinct indices.

An $m \times n$ triorthogonal matrix G can be used to construct an n -qubit, “triorthogonal,” stabilizer code as follows [8]. For each even-weight row of G , add a stabilizer by mapping non-zero entries to X operators, e.g., $(1, 0, 1) \mapsto X \otimes I \otimes X$. Add a stabilizer for each row of the orthogonal complement G^\perp by similarly mapping non-zero entries to Z operators. The logical X and Z operators are then given by mapping non-zero entries of the odd-weight rows of G to X and Z , respectively.

For example, fixing the six gauge qubits of the 15-qubit Hamming code to $|0^6\rangle$ gives a $[[15, 1, 3]]$ triorthogonal code [15]. Bravyi and Haah have constructed a $[[49, 1, 5]]$ and a family of $[[3k + 8, k, 2]]$ triorthogonal codes [8].

TOFFOLI CONSTRUCTION

We next construct a fault-tolerant Toffoli gate for a triorthogonal code. Shown in Fig. 1, the Toffoli gate is equivalent to a CCZ in which the target qubit is conjugated by Hadamard gates.

The main component of the construction is an implementation of an encoded CCZ gate. We claim that for any triorthogonal code, transversal application of CCZ gates realizes CCZ gates on the encoded qubits. For simplicity consider the case of a triorthogonal code with a single encoded qubit, i.e., based on a triorthogonal matrix G with a single odd-weight row, f_\star . (The argument with multiple encoded qubits is fully analogous.) Let $\mathcal{G}_0 \subseteq \{0, 1\}^n$ be the linear span of all the even-weight rows of G and let \mathcal{G}_1 be the coset $\{f_\star + g : g \in \mathcal{G}_0\}$. Then the encoding of $|a\rangle$, for $a \in \{0, 1\}$, is given by the uniform superposition over \mathcal{G}_a : $|\bar{a}\rangle = \frac{1}{\sqrt{|\mathcal{G}_a|}} \sum_{g \in \mathcal{G}_a} |g\rangle$.

The action of transversal CCZ on an encoded basis state $|\bar{a}, \bar{b}, \bar{c}\rangle$, for $a, b, c \in \{0, 1\}$, is therefore given by

$$\begin{aligned} \text{CCZ}^{\otimes n} |\bar{a}, \bar{b}, \bar{c}\rangle &= \sum_{g \in \mathcal{G}_a, h \in \mathcal{G}_b, i \in \mathcal{G}_c} \text{CCZ}^{\otimes n} |g, h, i\rangle \\ &= \sum_{g \in \mathcal{G}_a, h \in \mathcal{G}_b, i \in \mathcal{G}_c} (-1)^{|g \cdot h \cdot i|} |g, h, i\rangle. \end{aligned} \quad (1)$$

Here $g \cdot h \cdot i$ can be expanded as $(af_\star + g') \cdot (bf_\star + h') \cdot (cf_\star + i')$, where $g', h', i' \in \mathcal{G}_0$. Expanding further gives one term $abc(f_\star \cdot f_\star \cdot f_\star) = abc f_\star$, plus other triple product terms in which f_\star appears at most twice. Since G is triorthogonal, these other terms necessarily have even weight. The term $abc f_\star$ has odd weight if and only if $a = b = c = 1$. Substituting back into (1), as desired,

$$\text{CCZ}^{\otimes n} |\bar{a}, \bar{b}, \bar{c}\rangle = (-1)^{abc} |\bar{a}, \bar{b}, \bar{c}\rangle. \quad (2)$$

To complete the Toffoli construction, we also require a fault-tolerant implementation of the Hadamard H . For H to be transversal, the code must be self-dual, i.e., $\mathcal{G}_0 = G^\perp$. Unfortunately, no triorthogonal code is self-dual. Indeed, otherwise, since CCZ is transversal it would be possible to obtain transversal implementation of Toffoli and H for the same code. However, Toffoli and H together are universal [11, 12], and it is known that universality cannot be achieved by transversal gates alone [4] (see also [16, 17]).

Nonetheless, compact and fault-tolerant implementations of logical H are still possible. When transversal H is performed on a triorthogonal code, the logical operators are transformed properly: logical X maps to logical Z and vice versa. A subset of the stabilizers is preserved: observe that $\mathcal{G}_0 \subset G^\perp$, and thus each element of \mathcal{G}_0 corresponds to both X and Z stabilizers, which transversal H swaps. Transversal H does not preserve the Z stabilizers corresponding to $G^\perp \setminus \mathcal{G}_0$, so these must be restored by measuring and correcting them. In the $[[15, 7, 3]]$ example above, this involved measuring the six gauge qubits’ logical Z operators.

The Z stabilizers of $G^\perp \setminus \mathcal{G}_0$ can be restored during an X error-correction procedure. Steane’s procedure, for example, involves a transversal CNOT from the data to an encoded $|+\rangle = \frac{1}{\sqrt{2}}(|0\rangle + |1\rangle)$ “ancilla” state [13, 18]. The transversal CNOT implements encoded CNOT and has the effect of copying the unwanted X stabilizers onto the ancilla, and copying the desired Z stabilizers from the ancilla to the data. Transversal Z -basis measurements of the ancilla then permit correcting X errors on the data, while simultaneously restoring the stabilizer group. (Once again, in the $[[15, 7, 3]]$ example, the ancilla’s gauge qubits are prepared in $|0^6\rangle$. Each is measured as 0 or 1, with a correction required in the latter case.) See Fig. 2. Alternatively, Shor’s error-correction procedure uses a separate GHZ state $\frac{1}{\sqrt{2}}(|00\dots 0\rangle + |11\dots 1\rangle)$ for each stabilizer to be measured [3]. In either case, the required

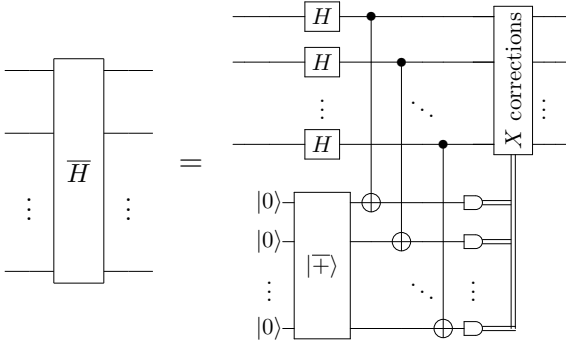


FIG. 2: An implementation of the logical Hadamard operation in a triorthogonal code. Transversal Hadamard gates are applied to the data block. In order to restore the data to the codespace, and also correct any X errors, an encoded $|+\rangle$ state is prepared, coupled to the data with transversal CNOT gates and measured. X corrections are applied as necessary.

stabilizers can be measured and corrected using H , X , CNOT, $|0\rangle$ preparation and Z -basis measurements. By using CCZ gates to simulate CNOT and X , the entire Toffoli requires only H and CCZ gates.

Importantly, even with additional X corrections to fix the Z stabilizers of $G^\perp \setminus \mathcal{G}_0$, the X error-correction procedure is fault tolerant. That is, k gate failures can lead to a data error of weight at most k , for k less than half the code's distance d . Indeed, d is the minimum of the code's distance d_Z against Z errors (determined by the X stabilizers of \mathcal{G}_0) and its distance d_X against X errors (determined by the Z stabilizers of G^\perp); and since $\mathcal{G}_0 \subset G^\perp$, $d_Z \leq d_X$. Thus any X error of weight less than $d/2$ can be corrected using only the Z stabilizers of \mathcal{G}_0 , and the Z stabilizers of $G^\perp \setminus \mathcal{G}_0$ can be corrected separately.

DISCUSSION

The simplest way to use the Toffoli construction above is with a concatenated triorthogonal code. A universal set of fault-tolerant operations can be constructed from only CCZ and H gates. Thus using triorthogonal codes for computation could be useful for circuits that contain large numbers of Toffoli gates. One could also imagine using multiple codes for computation by, for example, teleporting into the code best suited for each logical operation. In this setting, a triorthogonal code could be used to implement efficiently the CCZ operation.

Our construction allows for quantum computation to arbitrary accuracy, so long as the error rate per physical gate is below a constant “threshold” value [19, 20]. Threshold error rates for triorthogonal codes are largely unknown, though estimates for the $[[15, 1, 3]]$ code are roughly 0.01 percent per gate [21]. If the CCZ operation is constructed from a sequence of one- and two-qubit gates, then the threshold is likely lower. Toffoli- and

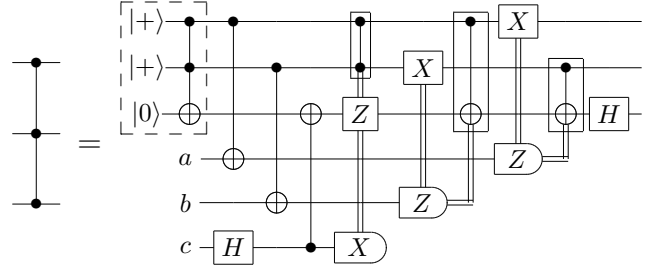


FIG. 3: A CCZ gate can be implemented by consuming a single Toffoli state [28]. The input qubits are teleported into the Toffoli state (enclosed by the dashed line) with Clifford corrections conditioned on the measurement outcomes.

CCZ-type gates have been demonstrated in a number of experimental settings, with fidelities ranging from 68 to 98 percent [22–25]. Since resource overhead increases rapidly as the physical noise rate approaches threshold, our construction is likely to be outperformed by schemes based on other codes, for which the threshold can be nearly one percent or higher (see, e.g., [6, 26, 27]).

A more conventional way to achieve universality is through state injection and distillation. Bravyi and Haah have proposed distillation procedures using triorthogonal codes that permit fault-tolerant implementation of the T gate [8]. Our result implies that a similar procedure could be used implement Toffoli gates.

The Toffoli state is defined by the output of the Toffoli gate on input $|+, +, 0\rangle$, where the third qubit is the target. A Toffoli state can be used to implement the CCZ gate as shown in Fig. 3. Distillation with an $[[n, k, d]]$ triorthogonal code uses n transversal CCZ gates with error rate p to produce k Toffoli states with error rate $O(p^d)$. See Fig. 4. The CCZ gates in the distillation circuit can be implemented recursively, or by using an existing Toffoli distillation procedure [9, 10, 14]. Note that the Hadamard gates are performed after decoding and thus the circuit in Fig. 2 is not required. For simplicity, Clifford operations including encoding and decoding operations are assumed to be perfect.

The distillation procedure given by Fig. 4 can significantly reduce the cost of implementing a Toffoli gate. Calculating the savings obtained by using triorthogonal codes instead of, or in combination with, existing Toffoli distillation procedures is somewhat involved, but can be illustrated with the following example used in [10]. Suppose we wish to implement a Toffoli gate with error below 10^{-12} . The procedure of [10] consumes eight T gates with error p to produce a Toffoli state with error $O(p^2)$. The T gates can be implemented using, for example, the method of [29]. If physical T gates can be performed with error at most 10^{-2} , then using the Toffoli construction of [10], as given, requires on average 697.6 T gates.

Alternatively, we could use a $[[3k+8, k, 2]]$ triorthogonal code for distillation at the top level, and use Toffoli states

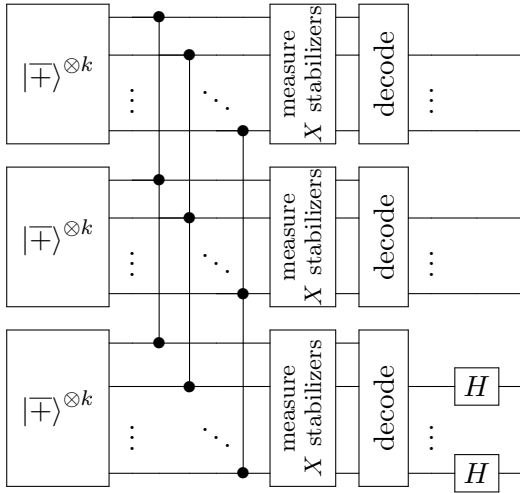


FIG. 4: A Toffoli state distillation circuit using a triorthogonal code encoding k qubits. Three separate blocks are encoded into the state $|+\rangle^{\otimes k}$ and then transversal CCZ gates are applied. Conditioned on detecting no errors, each block is decoded and Hadamard gates are applied to each of the target qubits, yielding k Toffoli states.

from [10] as input to implement the CCZ gates in Fig. 4. In this way a single Toffoli state can be produced at an average cost of roughly three input Toffoli states distilled to 10^{-6} . Each input Toffoli state now involves only $5.5 \cdot 8 = 44$ T gates, yielding a more than five-fold total savings over the procedure due to [10] alone.

Finally, we note that if the orthogonality conditions on the matrix G are increased, then additional types of diagonal operations are transversal. If G satisfies the condition that all j -tuple products have weight $(0 \bmod 2)$ for all $2 \leq j \leq h$, then the h -fold controlled- Z gate is transversal in the corresponding stabilizer code. This observation is similar to a result of Landahl and Cesari, who demonstrated that codes satisfying increasingly stringent conditions on weights of the codewords admit transversal Z -axis rotations of increasing powers of $1/2^k$ [30].

Supported in part by the Intelligence Advanced Research Projects Activity (IARPA) via Department of Interior National Business Center contract number D11PC20166. The U.S. Government is authorized to reproduce and distribute reprints for Governmental purposes notwithstanding any copyright annotation thereon. Disclaimer: The views and conclusions contained herein are those of the authors and should not be interpreted as necessarily representing the official policies or endorsements, either expressed or implied, of IARPA, DoI/NBC, or the U.S. Government.

- [2] D. Gottesman, *Stabilizer Codes and Quantum Error Correction*, Ph.D. thesis, Caltech (1997), arXiv:quant-ph/9705052.
- [3] P. W. Shor, Proc. 37th IEEE Symp. on Foundations of Computer Science (FOCS), 56 (1996), arXiv:quant-ph/9605011.
- [4] B. Eastin and E. Knill, Phys. Rev. Lett. **102**, 110502 (2009), arXiv:0811.4262 [quant-ph].
- [5] S. Bravyi and A. Kitaev, Phys. Rev. A **71**, 022316 (2004), arXiv:quant-ph/0403025.
- [6] R. Raussendorf and J. Harrington, Phys. Rev. Lett. **98**, 190504 (2007), arXiv:quant-ph/0610082.
- [7] A. G. Fowler, S. J. Devitt, and N. C. Jones, arXiv:1301.7107 [quant-ph] (2013).
- [8] S. Bravyi and J. Haah, Phys. Rev. A **86**, 052329 (2012), arXiv:1209.2426 [quant-ph].
- [9] B. Eastin, Phys. Rev. A **87**, 032321 (2013), arXiv:1212.4872 [quant-ph].
- [10] N. C. Jones, Phys. Rev. A **87**, 022328 (2013), arXiv:1212.5069 [quant-ph].
- [11] Y. Shi, Quant. Inf. Comput. **3**, 84 (2003), arXiv:quant-ph/0205115.
- [12] D. Aharonov, arXiv:quant-ph/0301040 (2003).
- [13] A. M. Steane, Phys. Rev. Lett. **78**, 2252 (1997), arXiv:quant-ph/9611027.
- [14] N. C. Jones, arXiv:1303.6971 [quant-ph] (2013).
- [15] E. Knill, R. Laflamme, and W. H. Zurek, arXiv:quant-ph/9610011 (1996).
- [16] B. Zeng, A. W. Cross, and I. Chuang, Information Theory, IEEE Transactions on **57**, 6272 (2011), arXiv:0706.1382.
- [17] X. Chen, H. Chung, A. Cross, B. Zeng, and I. Chuang, Phys. Rev. A **78**, 012353 (2008), arXiv:0801.2360.
- [18] A. M. Steane, arXiv:quant-ph/0202036 (2002).
- [19] D. Aharonov and M. Ben-Or, Proc. 29th ACM Symp. on Theory of Computing (STOC), 176 (1997).
- [20] P. Aliferis, D. Gottesman, and J. Preskill, Quant. Inf. Comput. **6**, 97 (2006), arXiv:quant-ph/0504218.
- [21] A. W. Cross, D. P. DiVincenzo, and B. Terhal, Quant. Inf. Comput. **9**, 541 (2009), arXiv:0711.1156 [quant-ph].
- [22] T. Monz, K. Kim, W. Hänsel, M. Riebe, A. Villar, P. Schindler, M. Chwalla, M. Hennrich, and R. Blatt, Phys. Rev. Lett. **102**, 040501 (2009), arXiv:0804.0082 [quant-ph].
- [23] M. Mariantoni, H. Wang, T. Yamamoto, M. Neeley, R. C. Bialczak, Y. Chen, M. Lenander, E. Lucero, A. D. O'Connell, D. Sank, M. Weides, J. Wenner, Y. Yin, J. Zhao, A. N. Korotkov, A. N. Cleland, and J. M. Martinis, Science **334**, 61 (2011), arXiv:1109.3743.
- [24] A. Fedorov, L. Steffen, M. Baur, M. P. da Silva, and A. Wallraff, Nature **481**, 170 (2012), arXiv:1108.3966.
- [25] M. D. Reed, L. DiCarlo, S. E. Nigg, L. Sun, L. Frunzio, S. M. Girvin, and R. J. Schoelkopf, Nature **482**, 382 (2012), arXiv:1109.4948 [quant-ph].
- [26] E. Knill, Nature **434**, 39 (2005), arXiv:quant-ph/0410199.
- [27] D. S. Wang, A. G. Fowler, and L. C. L. Hollenberg, Phys. Rev. A **83**, 020302 (2011), arXiv:1009.3686 [quant-ph].
- [28] M. A. Nielsen and I. L. Chuang, *Quantum Computation and Quantum Information* (Cambridge University Press, Cambridge, 2000).
- [29] A. M. Meier, B. Eastin, and E. Knill, Quant. Inf. Comput. **13**, 195 (2013) arXiv:1204.4221 [quant-ph].
- [30] A. J. Landahl and C. Cesare, arXiv:1302.3240 [quant-ph] (2013).